

48
VOLT

DOOR OPENER BRINK

For doors up to 130 kg
Opening time 4-12 sec.

10DOORBRINK

Single leaf swing door opener, powered opening, powered closing, wind stop. Max. leaf 130 kg and 1000 mm

10DOORBRINK-S

Single leaf swing door opener, powered opening, spring closing, wind stop. Max. leaf 130 kg and 1000 mm

10DOORBRINK-SL

Single leaf swing door opener, powered opening, spring closing, wind stop. Max. leaf 100 kg and 1000 mm

Features:

- commercial use
- max. opening 95°
- for door panels up to 130 kg and 1000 mm
- built-in electronic control unit
- in or out swing
- single or double swing leaf installation

Pros:

- intensive use
- ideal for offices, supermarkets, hospitals and public entrances
- can automate most swing doors, new or existing
- quick and easy installation
- react immediately to any obstacle
- wind stop: resists wind pressure
- high reliability and smooth operation
- self-adjusting gate stroke through optical encoder



1 - S-10DOORADMU
2 - S-10DOORSS1023




Technical features	BRINK / BRINK-S	BRINK-SL
Power supply	115/230 V AC (50 - 60 Hz)	115/230 V AC (50 - 60 Hz)
Motor power supply	48 V DC with encoder	48 V DC with encoder
Absorbed power	120 W	120 W
Opening speed	4 - 12 sec.	4 - 12 sec.
Closing speed	5 - 15 sec.	5 - 15 sec.
Duty cycle	100 %	100 %
Operating temperature	-15°C / +55°C	-15°C / +55°C
Degree of protection	IP 32	IP 32
Max. opening	95°	95°
Max. gate leaf weight	130 kg	100 kg




3 - S-10DOORRAD2
4 - S-10DOORSAL


Accessories

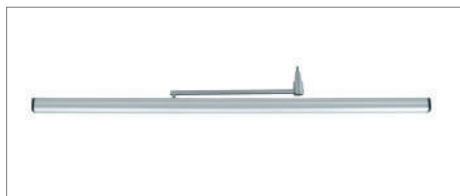


S-10DOORBST
Track (PULL operation)



Length of door (mm)	Max weight (Kg)
700	130
750	124
800	118
850	113
900	108
950	104
1000	100

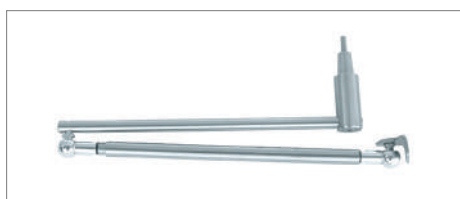

S-10DOORBSS
Scissor arm (PUSH operation)



Length of door (mm)	Max weight (Kg)
800	92
850	89
900	85
950	83
1000	80



S-10DOORSS340
Safety sensor for obstacle detection, 340 mm long



S-10DOORSS1023
Obstacle detection safety device, 1023 mm long



S-10DOORRAD2
Radar for activation and safety



S-10DOORTL
Microwave, hygienic, touchless, automatic door activation switch, scanned area 4 m, 3 different faceplates included



S-10DOORRAD
Active infrared motion detector



S-10DOORPROGT
Programming keypad



S-10DOORRADM
Microwave radar detector, scanned area 4 m



S-10T-LINESELF
Function selector



S-10DOORRADMU
Microwave radar detector, unidirectional, scanned area 4 m.



S-10DOORSAL
Swing doors safety cover



S-10DOORKIT2BRK
Aluminium cover for two BRINK openers, complete with cable for Master/Slave connection

