


230 VOLT

OPERATOR MF30

For top or bottom hinged windows. Maximum weight 30 kg

850MF30

230 V hinged window opener. Maximum window weight 30 kg

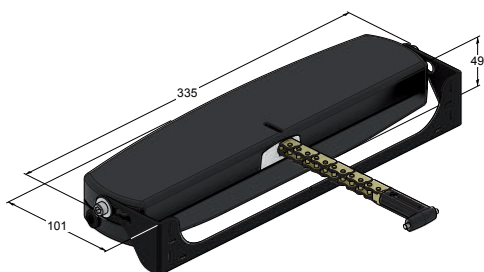

Technical features

	MF30
Power supply	230 V AC (50 Hz)
Maximum thrust load capacity	300 N
Maximum traction load capacity	300 N
Corse (selezionabili in qualsiasi momento)	200 and 380 mm
Absorption	0,32 A
Loadless translation speed	24 mm/sec.
Duration of maximum loadless travel	16 sec.
Double electrical insulation	Yes
Type of service	S2 of 4 min.
Operating temperature	-5° C ÷ +50° C
Protection of electrical devices	IP 30
Adjustment of the window frame connection	15 mm
Pins adjustment for swivel brackets	15 mm
Connection in parallel more actuators on the same window	Only by means of suitable electronic device
Parallel connection of multiple actuators on different windows	Yes (see wiring diagram)
Chain position control	Yes
Electronics equipped with audible warning device to signal incorrect assembly (buzzer)	Yes
Weight of installed equipment	1,1 kg

Features:

- 230 V motor
- double flex stainless steel chain
- compact size
- two chain adjustments: 200 or 380 mm

Pros:

- suitable for top or bottom hinged windows
- noiseless and compact
- quick installation
- robust, maintenance-free

