

230 VOLT

OPERATOR MRC

For interior blinds and shutters.
Maximum torque 50 Nm.



850MRC10

230 V Tubular motor, Ø 45 mm, c/w bracket and crown drive adapter kit for octagonal tube 60 mm. 10 Nm torque

850MRC20

230 V Tubular motor, Ø 45 mm, c/w bracket and crown drive adapter kit for octagonal tube 60 mm. 20 Nm torque

850MRC30

230 V Tubular motor, Ø 45 mm, c/w bracket and crown drive adapter kit for octagonal tube 60 mm. 30 Nm torque

850MRC40

230 V Tubular motor, Ø 45 mm, c/w bracket and crown drive adapter kit for octagonal tube 60 mm. 40 Nm torque

850MRC50

230 V Tubular motor, Ø 45 mm, c/w bracket and crown drive adapter kit for octagonal tube 60 mm. 50 Nm torque

Materials	Kg/m2
PVC	5
Wood	10
Insulated aluminium	4
Extruded aluminium	8
Insulated steel	10
Armour-plated steel	16

Technical features	MRC10	MRC20	MRC30	MRC40	MRC50
Degree of protection	IP 44				
Power supply	230 V AC (50 - 60 Hz)				
Absorption	0,63 A	0,92 A	1,1 A	1,3 A	1,4 A
Absorbed power	146 W	205 W	230 W	292 W	308 W
Crown Speed	15 rpm	15 rpm	15 rpm	15 rpm	12 rpm
Lifting Power	18 kg	38 kg	56 kg	76 kg	94 kg
Operating temperature	-10° C ÷ +60° C				
Operating time	4 min.				
Torque	10 Nm	20 Nm	30 Nm	40 Nm	50 Nm

Features:

- tubular motor Ø 45 mm
- torque up to 50 Nm
- 230 V motor
- self-braking motor
- max. run time 4'

Pros:

- ideal for existing shutters / blinds
- quick installation
- easy setting of limit switches



Accessories



850AD60C
Replacement crown drive adapter kit for octagonal tube 60 mm




850DZ68
Replacement bracket for tubular motors



850SF553
Replacement bracket for MRC tubular motors



850CT60
Universal idler end cap for tube Ø 60 mm

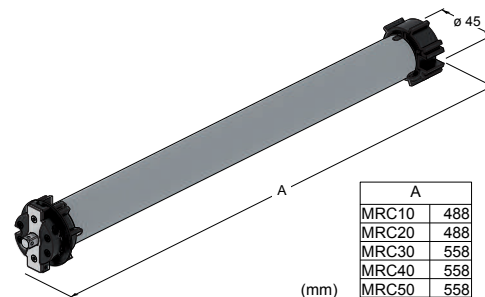

850SF523
Adjustable bracket for MRC tubular motors



850BTOT607
Anti-lift stopper for octagonal tube 60 mm



850SF511
Bracket for MRC tubular motors



750K330M
Electrical control panel with 433,92 MHz radio receiver and casing



850SF823
Click-in bracket for MRC tubular motors

Application chart for rolling shutters

