



# KIT

max.  
**3,5+3,5m**

**DC  
MOTOR**



## KITR40

Complete underground automation kit for gates up to 3,5 + 3,5 m, with two **650R40** gate operators (1 with cable  $l=2,3$  m + 1 with cable  $l=9$  m). Foundation boxes to be ordered separately

### Accessories included in the kit:



**900VLED** Low voltage 12-18-24 Volt white led flashing light



**750D749MA** Electronic control unit for one or two DC gate operators with encoder, complete with 433,92 MHz rolling code radio receiver, battery charger, transformer and enclosure



**300T-KEY + LED TSL** Die-cast aluminium key switch + LED courtesy light for T-KEY



**900OPTIC** Set of infrared safety photocells, 12/24 V, surface mount, beam alignment adjustable up to 15°, up to 20 m range



**250K-SLIMRP** Two-channel transmitter, rolling code technology, 433,92 MHz



**C-CRT** Warning signal



## KITR402

Complete underground automation kit for gates up to 3,5 + 3,5 m, with two **650R40** gate operators (1 with cable  $l=2,3$  m + 1 with cable  $l=9$  m). Foundation boxes to be ordered separately

### Accessories included in the kit:



**900VLED** Low voltage 12-18-24 Volt white led flashing light



**750D749MA** Electronic control unit for one or two DC gate operators with encoder, complete with 433,92 MHz rolling code radio receiver, battery charger, transformer and enclosure



**900OPTIC** Set of infrared safety photocells, 12/24 V, surface mount, beam alignment adjustable up to 15°, up to 20 m range




**250K-SLIMRP** Two-channel transmitter, rolling code technology, 433,92 MHz



**250K-SLIMRP** Two-channel transmitter, rolling code technology, 433,92 MHz



**C-CRT** Warning signal

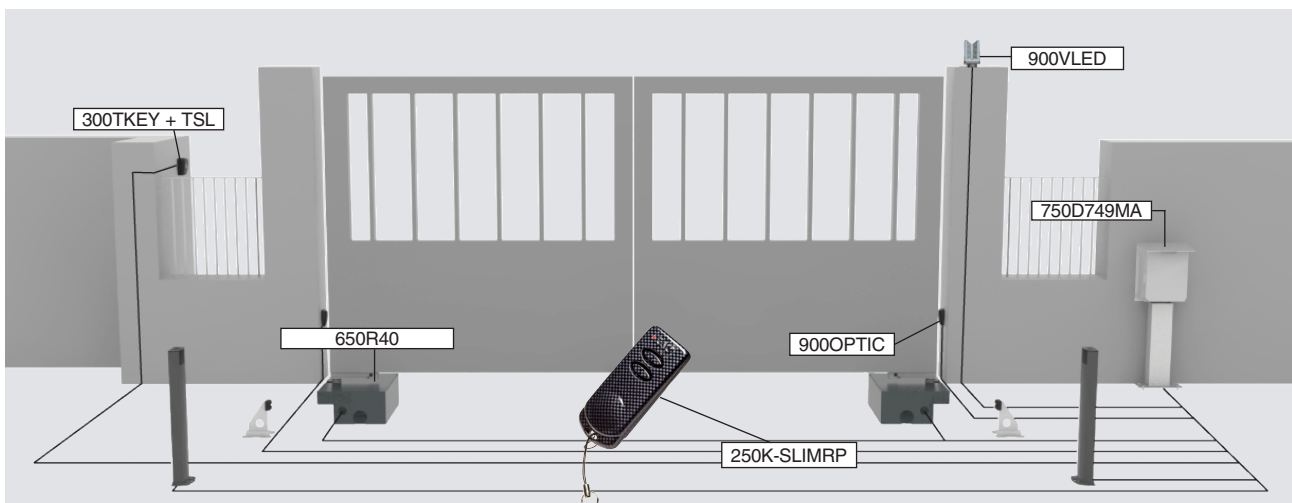



# KIT max. 3,5+3,5m | 230 V

## KITR30



Complete underground automation kit for gates up to 3,5 + 3,5 m, with two **650R30** gate operators (1 with cable  $l=2,3$  m + 1 with cable  $l=9$  m). Foundation boxes to be ordered separately

### Accessories included in the kit:



**900VLED** Low voltage 12-18-24 Volt white led flashing light



**750D770M** Electronic control unit for one or two 230 V gate operators with soft-stop and built-in 433,92 MHz rolling code radio receiver, complete with enclosure



**300T-KEY + LED TSL** Die-cast aluminium key switch + LED courtesy light for T-KEY



**900OPTIC** Set of infrared safety photocells, 12/24 V, surface mount, beam alignment adjustable up to 15°, up to 20 m range



**250K-SLIMRP** Two-channel transmitter, rolling code technology, 433,92 MHz



**C-CRT** Warning signal

## KITR302



Complete underground automation kit for gates up to 3,5 + 3,5 m, with two **650R30** gate operators (1 with cable  $l=2,3$  m + 1 with cable  $l=9$  m). Foundation boxes to be ordered separately

### Accessories included in the kit:



**900VLED** Low voltage 12-18-24 Volt white led flashing light



**750D770M** Electronic control unit for one or two 230 V gate operators with soft-stop and built-in 433,92 MHz rolling code radio receiver, complete with enclosure



**900OPTIC** Set of infrared safety photocells, 12/24 V, surface mount, beam alignment adjustable up to 15°, up to 20 m range



**250K-SLIMRP** Two-channel transmitter, rolling code technology, 433,92 MHz



**250K-SLIMRP** Two-channel transmitter, rolling code technology, 433,92 MHz



**C-CRT** Warning signal

